TWISTEST-EVOLUTION

Winding speed testing and monitoring of automatic watches and movement



Benefits:

- Gearless drive guarantees the appropriate rotation ratio and a very long service life
- Maintenance intervals over two years
- Central rotation speed from 1 rotation per day to 10 rpm
- Detachable touch-screen
- Two operating modes: Timer and round
- Speed and duration or number of round management
- Creation and management of programs
- Broad scope of use from laboratory to production
- Program transfer from one machine to another by SD card
- Load capacity up to 7 kg per arm
- Total load capacity up to 300 watch heads
- Lockable, tinted glass sliding doors with security
- External emergency stop
- Possibility to install one TWISTEST on top of another



Standard box-holding arms with mechanical locking system



Foam arm for wristwatches




TWISTEST-*EVOLUTION*

Two operating modes :

| test 2.tm | 13.03.14 / 14:00 Dép.13.03.14 / 14:00 | | test 3.tr | | 13.03.14 / 17:44 |
|-----------------------|--|---------------------|-----------------------|------------|----------------------|
| Fin: 27.09.14 / 05:00 | | | Fin: 16.05.14 / 15:39 | | pép.13.03.14 / 14:00 |
| rép: | 0/5 | LOAD | | rép: 0/5 | |
| rép: 0/0 🕥 rép: 0/0 | | rép: 0/0 🔿 rép: 0/0 | | | |
| | | | | () () (| <i>(a (r a</i> |
| rép: 0/50 rép: 0 | | | rép: 0/50 | rép: 0/50 | rép: 0/50 |
| 01:30 /01:30 12:30 |) /12:30 01 : 30 /01:30 | | 899/990 | 0/2 | 0/2 |
| 4 tr/min 🖒 2 tr/m | nin う 4 tr/min さ | | 4 tr/min 🖒 | 2 tr/min 🔊 | 4 tr/min 🖒 |

Possibility to create and manage tests:

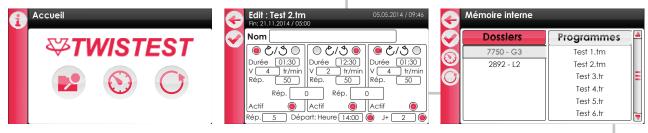

Technical specifications:

- Central axis rotation speed: 1, 2, 4 round per day, 1, 2 rph, 1-10 rpm
- Arm rotation ratio: 1:4.30789
- Max. load per arm: 7kg
- Noise level: 45db at 1m
- Colors NCS S 4502 B & RAL 7016 (other colors possible upon request)
- Three types of arm:
 - 1) Arm holding up to 5 INNOPACK boxes 310x128x27mm (VOH 25.01489)
 - 2) Arm holding up to 3 INNOPACK boxes 310x260x27mm (VOH 25.01490)
 - 3) Foam arm holding up to 12 wristwatches (VOH 25.01488)

Dimensions / power supply:

- TWISTEST : 1100mm x 1100mm x 400mm / 130 kg
- Power supply: 230 V

Peripherals:

